



YOUR KEY TO AUTOMATION ↗

SETTINGS FOR 4G MODULE

ALTECH AUTOGATE INT. PHILIPPINES INC.

B6 L28 Aphrodite St., Villa Olympia 6
San Pedro, Laguna 4023

@Altech Autogate | @Altech Enterprise



📞 +63 917 870 9928
+63 917 182 0156

☎️ (02) 8398-5669

✉️ autogate.ph@gmail.com

🌐 www.altech.ph

1. Download
(1)Xhouse IOT APP




FOR Android & IOS

- (2) Search "Xhouse-IOT" on Google play, search "XHOUSE-IOT" on APP Store for downloading APP.
- (3) Register and login in APP.

2. Add device

- (1) Insert a SIM card on the EGB-10 control board as shown in the figure. Remove the card slot and install the card

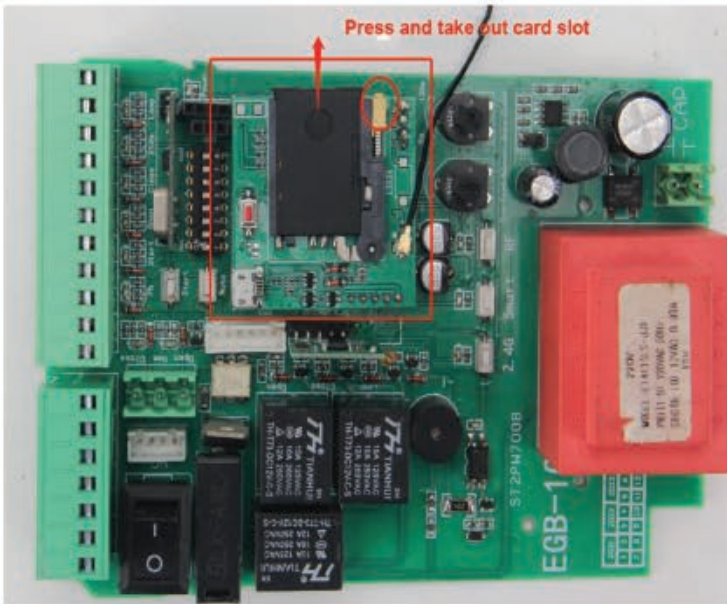

- (2) Power on control board, After successful networking, the indicator light "Smart" will light on. Observe the indicator light:

Flash: self-checking in progress

Slow flashing: searching the network


Normally on: The network is normal

Note: If the indicator light "Smart" does not keep light on, please check if the SIM card is installed correctly or does not support the SIM card of the operator.

- (3) Add device:

Add device select —select "Gate&Curtain automation" —select "Smart Gate " as follow picture

Or Click the QR code Scan directlyV

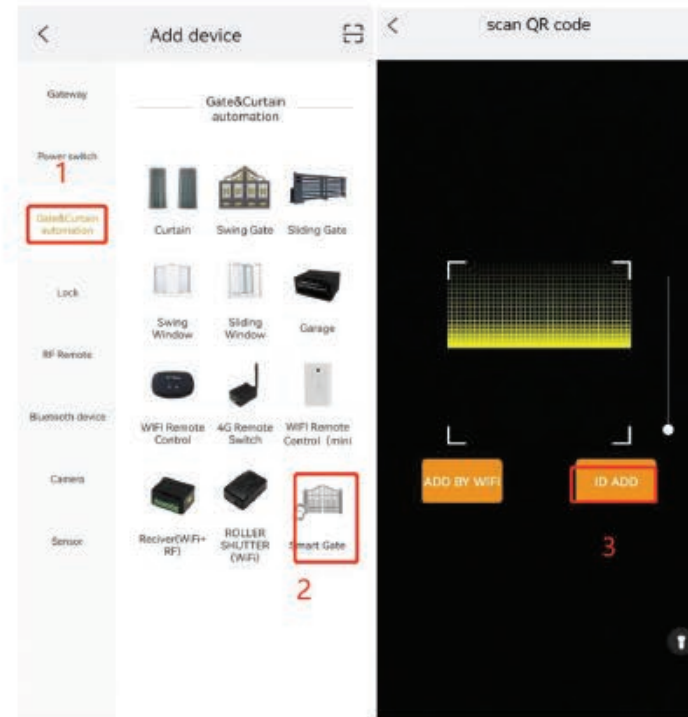

- (4) Initialize distribution network addition:

Long press and hold the "Smart" button for 5 seconds, and the buzzer will a short beep, and release button. The Smart module indicator light will flash, indicating successful initialization.

3. Successfully added

The device will check the status of gate in real-time, and users can clearly know whether it is currently open or closed.

