ALTECH
YOUR KEY TO AUTOMATION

SGCO1-Smart WiFi
Garage Door Opener

Input: DC 12-24V
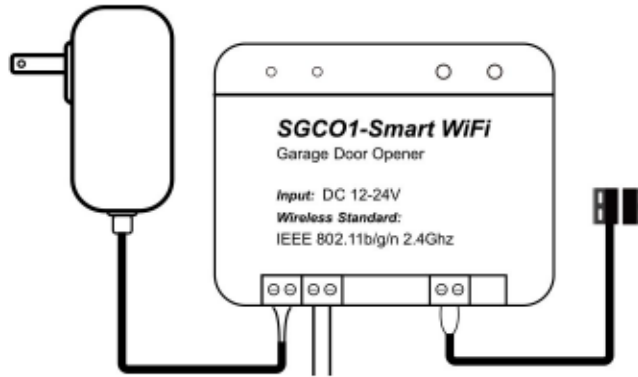**Wireless Standard:**
IEEE 802.11b/g/n 2.4Ghz

SGC-01 WI-FI SMART GARAGE DOOR OPENER

USER MANUAL

PACKAGE CONTENTS

Smart Garage Controller
(SGC-01)

Double sided adhesive tapes
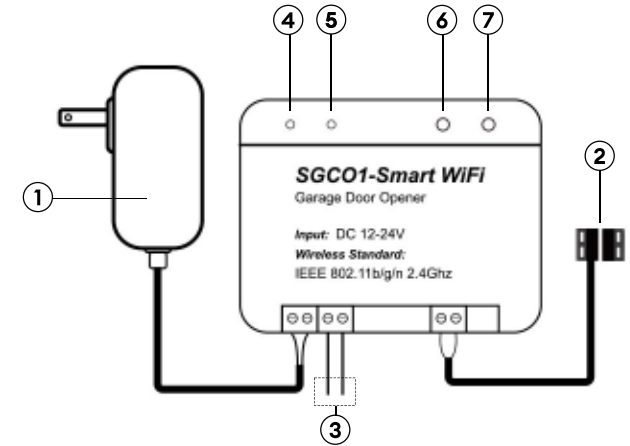
Brackets

zip ties/Wire clips

Test wire

Bolts/Screws

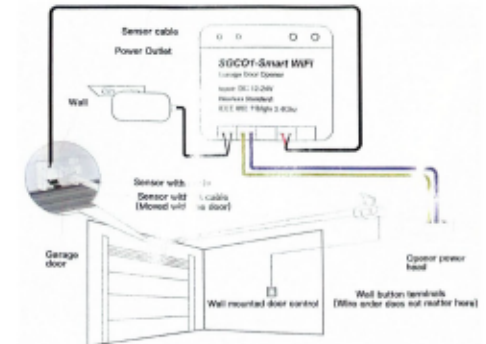## LED AND BUTTON RULES

① Power adapter
② Door sensors
③ Signal control cable
④ LED 1
⑤ LED 2
⑥ Button SW-1
⑦ Button SW-2 (For testing)

INSTALLATION GUIDE

1. SGC-01 smart garage door opener is the companion device of your existing garage door opener. Its main working principle is as follows.
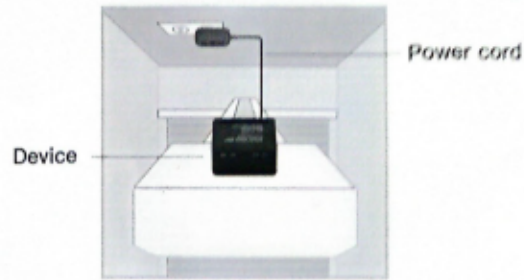

2. Scan the QR code to install the Xhouse app.

For Android / iOS

6. Deploy the device. We recommend to deploy it on the top of your existing garage door opener. Use the provided double-sided adhesive tapes for the fixation if necessary.
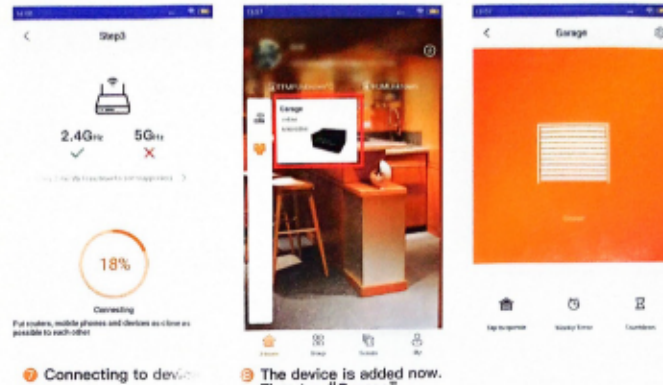

Power cord

Device

7. Power on both existing garage door opener and smart garage door opener. The smart garage door opener will reconnect to network automatically.

Congratulations! You have completed all installation steps. If you have any issuess or questions, please email us at Xhouse@x-house.net

Warranty

The warranty is 12 months from the product purchase date. If any problems for the products, please contact Xhouse@x-house.net for help. Thanks.
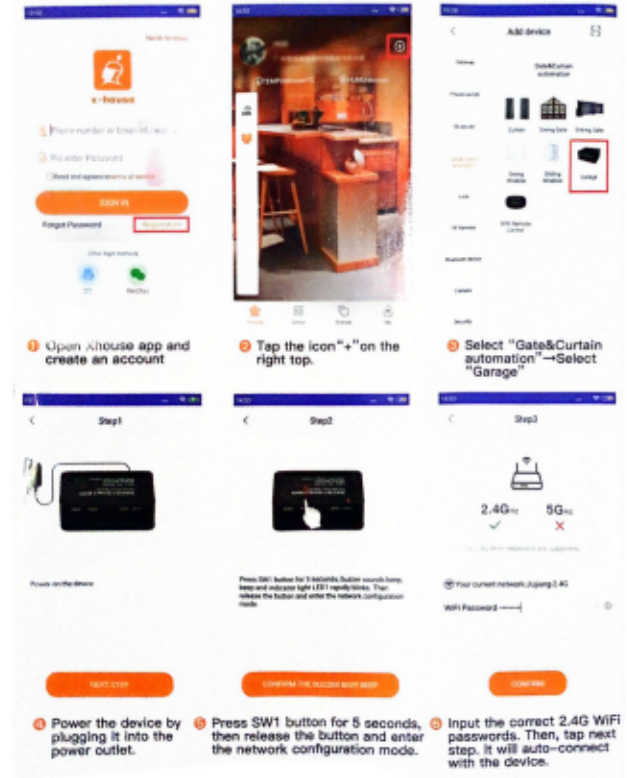

Step3

2.4GHz ✓   5GHz ✗

18%
Connecting

❼ Connecting to device

❽ The device is added now. Then tap "Garage".

4. Move the sensor to check if it is workable.

5. Find a proper position on the garage door to mount the sensors. Please make sure the distance between the two sensors is between 3mm to 25mm when the garage door is closed, and the two sensors are well separated when the garage door is open. Use the included wire ties and clips to secure the sensor with wire in place.

---

3. Connect the device to your home Wi-Fi with Xhouse app.
* The garage door will be activated when added successfully, so keep your door closed first.

❶ Open Xhouse app and create an account

❷ Tap the icon "+" on the right top.

❸ Select "Gate&Curtain automation"→Select "Garage"

❹ Power the device by plugging it into the power outlet.

❺ Press SW1 button for 5 seconds, then release the button and enter the network configuration mode.

❻ Input the correct 2.4G WiFi passwords. Then, tap next step. It will auto-connect with the device.