






CAR USB CHARGER REMOTE CONTROL / DUPLICATOR CZ-01 USER MANUAL

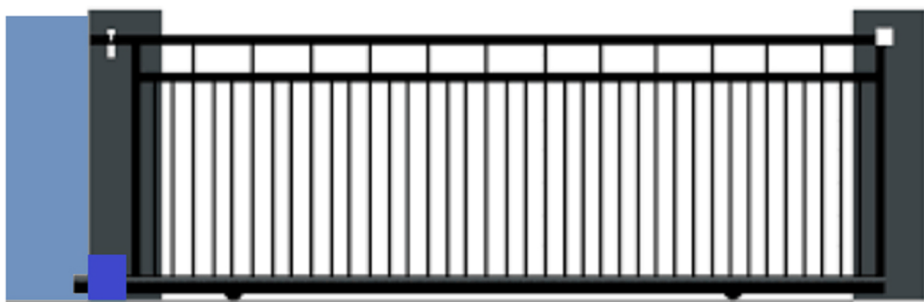


Instruction Of Remote Control Duplicator

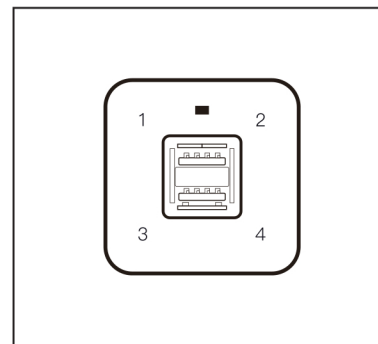


1. Duplicator

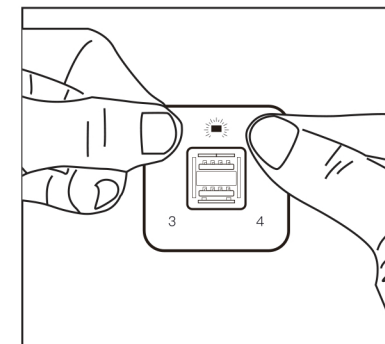

2. Clean all codes:
Power on the duplicator with USB cable included in set. Press 1st and 2nd button simultaneously until the LED flashes (about 10s), release both buttons - all codes will be deleted .

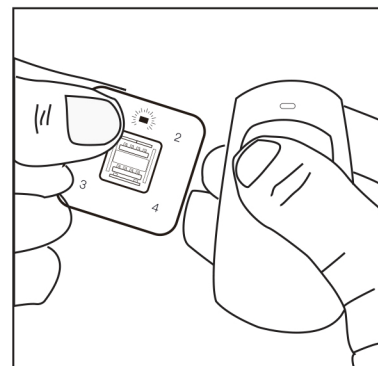

3. To duplicate code:
Hold the original and duplicator within 2cm distance to each other. Press and hold any button on the duplicator, LED light will flash slowly. Press and hold the button on the original remote control until the LED flashes rapidly. It means the code is learned successfully. Repeat the above operation to duplicate the codes for the other buttons.

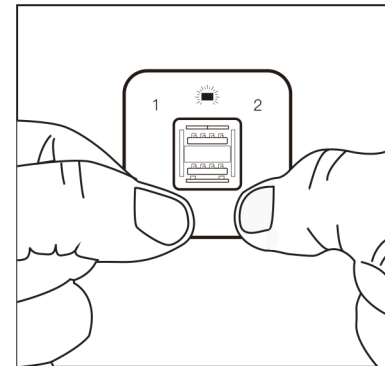

4. Code retrieval :
If the code is carelessly removed, by pressing 3rd and 4th button simultaneously until the LED flashes. The code will be recovered.

The duplicator can assign up to 4 different channels to the 4 buttons. I.E. up to 4 garage door or gate receiver. The duplicator can copy 99% fixed code. It can't copy rolling code. Please find below the sample brand list the duplicator can copy:

CAME TOP432NA	CAME-TOP432M	CAME-TOP432S	CAME-TOP434A	CAME-TOP434M	APLIMATIC-AEMX1 433	APLIMATIC-AEMX2 433	APLIMATIC-AEMX4 433
BFT-TEO4	BFT-TEO3	BFT-TEO2	CASIT-TXS1	DEA 433-1(237)	DEA 433-2(238)	DEA PUNIO2(268)	DEA GENIE S(263)
DEA-GENIE S(263L)	DUCATI-TSAW1	DUCATI-TSAW2	BLBERSAW1	BLBERSAW2	FAAC TM 433-1	FAAC TM 433-3	NICE-FLO1
NICE-FLO 2	BENINCA-LO T2W	BENINCA LO T2WMS	BENINCA LO T4W	TAU-250-TX2D	TBLCOMA-TANGO2SW	CASIT-TXS3	DUCATI-TSAW3
ELBER-TSAW3	SEAV-TXS1	SEAV-TXS3	SEAV-TXS4	CASIT-MPS TF4E	CASIT-MPS TF2E	CASIT-TXS2	CASIT-TXS4
V2 TSC4	CIBIDI-TMB 433-2	MONSEIGNEUR-ARC 2	MONSEIGNEUR-ARC 4	OPENOUT-TMQ433-4	PRASTEL-MPSTF 43RJ	PRASTEL-MPSTF 4EGRIS	RIB-MOCN 4
TAU-BUG4	TAU-250-TX4D	TELCOMA-TANGO4 SW					

USB car charger can be used as a regular remote control or remote duplicator which can copy most of fixed code remotes from different brands with frequency 300mhz-868mhz. It can store 4 different frequency fixed code in 4 different buttons. At the same time it is also a USB car power adapter that can be used for charging your mobile phone, tablet PC or other gadgets on your car. For gate opener with rolling codes it should be used in pair with ALTECH external or outdoor receivers.

COLOR	BLACK, WHITE	WORK VOLTAGE	DC 12-24V
MATERIAL	PLASTIC	USB OUTPUT VOLTAGE	DC 5V 1.5A
CODE	FIXED CODE	DISTANCE	UP TO 30M (OPEN AREA)
FREQUENCY	300-868MHZ		